

SKU : 124936

This series of surface grinders processes large and heavy workpieces with tolerances as required for precision surface grinding or for the preparatory processing step of lapping or polishing. The machine frame is designed in a cross-bed design with a movable column. This construction enables a long table guidance and thus the optimal introduction of weight force over the entire work area. The ability to switch between automatic or manual operation extends the scope for sample production, repair and training.

- Moving column design for maximum stability
- Magnetic clamping plate with built-in demagnetizing function
- Siemens Smart Line PLC control with grinding cycles
- NC-controlled Y/Z axes driven by servo motors
- User-friendly HMI with touchscreen
- Electronic handwheel for Y/Z axes



TECHNICAL SPECS

WORKING AREA

| | |
|------------------------------------|------------------|
| Table dimensions | 600 mm x 1600 mm |
| Spindle center-to-table distance | 600 mm |
| Table load capacity (max.) | 1300 kg |
| Magnetic chuck height | 110 mm |
| Dimensions magnetic clamping plate | 600 mm x 800 mm |
| Number of magnetic chucks | 2 positions |

TRAVELS

| | |
|---------------|---------|
| Travel X-axis | 1600 mm |
| Travel Y-axis | 630 mm |

FEED

| | |
|-----------------------|-------------------------|
| Hydr. feed X-axis | 5 m/min - 25 m/min |
| Feed Y-axis | 50 mm/min - 500 mm/min |
| Feed depth, Y-axis | 0.005 mm - 0.05 mm |
| Feed Z-axis | 50 mm/min - 1500 mm/min |
| Automatic Z-axis feed | 0 mm/min - 30 mm/min |

GRINDING WHEEL



| | |
|----------------------------|-------------------------|
| Grinding wheels dimensions | 350 mm x 40 mm x 127 mm |
| Speed | 1450 1/min |

DRIVE CAPACITY

| | |
|-------------------------|--------|
| Motor rating main drive | 7.5 kW |
| Hydraulic motor rating | 5.5 kW |
| Y-axis servo motor | 2 kW |
| Z-axis servo motor | 0.5 kW |

MEASURES AND WEIGHTS

| | |
|--|------------------------|
| Overall dimensions (length x width x height) | 5.5 m x 2.75 m x 2.7 m |
| Weight | 7000 kg |

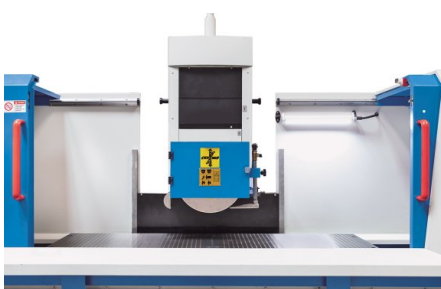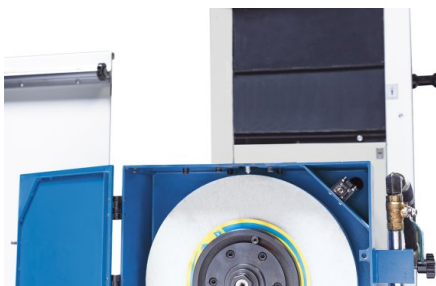

PRODUCT DETAILS

- The massive, heavily ribbed cross-bed machine frame with traversing column and horizontal spindle is extremely rigid even under heaviest workpiece loads
- The large work area allows machining of single workpieces with large surface areas or machining of several workpieces in one setup
- A high-performance cooling system is included in the standard equipment of this series

Control

- Grinding cycles for automatic face and groove grinding are accessible and editable via touchscreen
- Preloaded ball screws and powerful servo-motors on Y and X ensure high precision and repeatability during grinding wheel feeds
- An electronic hand-wheel for Y- and Z-axis simplifies setup and manual positioning of the grinding spindle
- If set to Auto mode, the user-defined roughing and finishing parameters, number of spark-out strokes, and return to zero are automatically processed

Grinding spindle

- Large grinding spindle, dynamically balanced, completely sealed with permanent lubrication
- Preloaded precision-bearings ensure maximum grinding performance and high reliability over many production hours

Hydraulics

- Extremely quiet operation and minimal heat build-up for optimum work results under continuous operating conditions
- The hydraulic linear table feed is infinitely variable, maintains a constant speed with smooth travel direction reversals
- External hydraulic unit with oil cooler unit ensures perfect temperature stability

Magnetic clamping plate

- Large magnetic chucks for torsion-free clamping across the entire work surface are included in the standard equipment
- The modern control also ensures reliable operation with firm holding forces and high-grade degaussing

STANDARD EQUIPMENT

2-axis position indicator X.Pos 3.2
 Electronic Handwheel for Y Z Axis
 Grinding wheel flange
 Workspace enclosure
 Coolant system
 Diamond dresser stand (without diamond)
 Balancing station
 Balancing shaft
 LED work lamp
 Magnetic clamping plate
 Adjustment screws
 Operating tools
 Operator manual
 Siemens PLC-control with Touchscreen
 Grinding wheel
 Automatic central lubrication

OPTIONAL EQUIPMENT

- Coolant system with magnetic separator and paper filter, SKU : 253467
- Magnetic separator without reservoir, SKU : 253469
- Servo grinding stone dresser, SKU : 254261

