



SKU : 133642

The KMT B series is ideal for processing long or thick sheet metal in metalworking shops, for repairs and in individual production. The guillotine shears with motor drive have a modern, high-quality and very stable construction. The guided cutter bars also enable cuts with little twist in the workpiece. The cutting length can be precisely positioned manually on the backgauge.

- Solid steel weldment
- Rugged long support arms
- Mobile control unit with foot switch
- Manual back gauge with counter (back-of-machine operation)

TECHNICAL SPECS

WORKING AREA

Working length	49 in
Cutting angle	2.4 deg
Strokes per minute (automatic mode)	27 H/min
Knife length	53 in
Work table height	33 in
Support arms	24 in
Number of support arms	2 positions

BACK GAUGE

Rear stop	25 in
-----------	-------

CUTTING CAPACITIES


Plate thickness (max.) - 450 N/mm ²	0.031 in - 0.157 in
--	---------------------

DRIVE CAPACITY


Motor rating main drive	5.4 Hp
-------------------------	--------

MEASURES AND WEIGHTS

Overall dimensions (length x width x height)	68 in x 63 in x 47 in
Weight	2607 lbs



Swivel-mounted workspace enclosure ensures operator safety

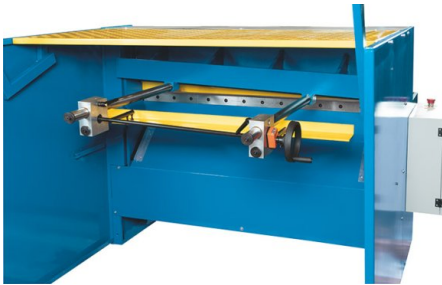

PRODUCT DETAILS

Machine Frame and Drive System

- The machine frame is made of a rigid, solid steel weldment
- A rubber-coated hold-down automatically fixates the plate
- A small knife angle ensures cut accuracy

Material Support

- The rigid side angle stop simplifies alignment of the plate to the cut line
- Rugged support arms ensure a good hold of large plates on the support table

Operation and Ergonomics

- Illuminated cut line ensures good visibility of marking
- The mobile control unit features a foot switch, so the operator has both hands free

Back Gauge

- Manual back gauge with counter
- The back gauge is robust and rigid and can handle any challenges in everyday operations
- The work area at the back gauge is covered with safety panels

STANDARD EQUIPMENT

Foot pedal with emergency stop switch
 Side angle stop
 Support arms
 Automatic hold-down
 Cut-line lighting
 Manual rear stop
 Operator instructions