



# Belt/Disk Sanders KRA 75 T



## SKU : 170202

The belt grinder of the KRA series offers the possibility to prepare pipe ends precisely for pipe connections. An angle-adjustable clamping device for pipes can be easily moved using a hand lever. In addition, there is a large grinding surface and a contact surface on the drive roller for universal grinding work. A dust collection system can be connected via a nozzle. The belt grinders of this series are suitable for all workshops and production facilities that process tubes into racks or frames.

- For precise grinding of tube unions
- Contact roll for grinding of shaft ends
- Longitudinal grinding surface for deburring
- Suitable for stainless steel and aluminum
- Ready for vacuum exhaust connection

## TECHNICAL SPECS

### WORKING AREA


Grinding diameter	0.8 in - 3 in
Angle adjustment	30 - 90°

### DRIVE CAPACITY

Motor rating	3 / 3,8 Hp
--------------	------------

### MEASURES AND WEIGHTS

Blade dimensions	3.94 in x 78.74 in
Overall dimensions (length x width x height)	58 in x 46 in x 26 in
Weight	348 lbs

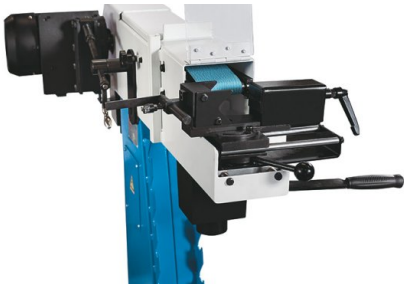

*Extra solid clamping system with rigid v-block jaws for a secure hold of tubes, flat and square materials*

## PRODUCT DETAILS

- Suitable for tube diameters from 0.8 to 3 inch
- Grinding angle adjustable from 30 to 90°
- Comfortable handling of the entire grinding system
- Quick and easy grinding wheel replacement
- Large grinding surface on top of machine, for deburring or sanding of surfaces
- The drive roller at the machine rear can be used for grinding operations
- Two belt speeds - step 1 for stainless steel and aluminum - step 2 for steel and other materials
- Rigid, vibration-damping base with roller mount



## STANDARD EQUIPMENT

Base  
1 standard sanding belt (36 grit)  
1 sanding wheel (1.7 inch diameter)  
Operating tools  
Operator instructions

