



# Wire Cut EDM NeoSpark B 500

**SKU : 180559**

The machines of the NeoSpark CNC series are among the most precise wire EDM machines with reciprocal wire guidance on the market. They offer excellent performance when machining electrically conductive materials in mold and tool making. The NeoSpark series is a popular choice for companies that specialize in additive manufacturing and want to separate the finished part from its base plate with high precision. High speed wire cutting guarantees deformation-free and burr-free cutting of even the most delicate 3-D printed metal structures with the best surface quality.

- Electrical discharge machining with highest cost-efficiency
- Easily programmable CNC control
- Real-time system diagnostics, high process reliability
- Time-saving programming during the machining process



## TECHNICAL SPECS

### WORKING AREA

|                                              |                          |
|----------------------------------------------|--------------------------|
| Table dimensions                             | 820 mm x 520 mm          |
| Workpiece, length x width x thickness (max.) | 1.190 mm                 |
| Workpiece weight (max.)                      | 800 kg                   |
| Travel X-axis                                | 600 mm                   |
| Travel Y-axis                                | 400 mm                   |
| Travel U / V-axis                            | 70 / 70 mm               |
| Travel Z-axis                                | 350 mm                   |
| Cutting angle (with guide)                   | ± 10° / 80 mm            |
| Cutting capacity (max.)                      | 300 mm <sup>2</sup> /min |
| Generator                                    | 10 A                     |

### CNC CONTROL

|                        |           |
|------------------------|-----------|
| Display size / type    | 15" / LED |
| Controlled axis        | 4         |
| Input increment (min.) | 0,001 mm  |

### DIELECTRIC SYSTEM

|                           |       |
|---------------------------|-------|
| Dielectric, tank capacity | 120 l |
|---------------------------|-------|

### FEED

|                       |              |
|-----------------------|--------------|
| Rapid feed X / Y axis | 1.000 mm/min |
|-----------------------|--------------|

### ACCURACIES


|                                  |           |
|----------------------------------|-----------|
| Positioning accuracy X- / Y-axis | 0,01 mm   |
| Positioning accuracy U/V axis    | 0,02 mm   |
| Repeatability X- / Y-axis        | 0,005 mm  |
| Repeatability U / V axis         | 0,01 mm   |
| Best surface roughness           | 0,8 µm Ra |

### DRIVE CAPACITY


|                         |         |
|-------------------------|---------|
| Motor rating X / Y axis | 0,2 kW  |
| Motor rating U / V axis | 0,02 kW |
| Motor rating Z-axis     | 0,02 kW |
| Total power consumption | 4,5 kVA |

### MEASURES AND WEIGHTS

|                                              |                         |
|----------------------------------------------|-------------------------|
| Overall dimensions (length x width x height) | 2,4 m x 1,89 m x 2,06 m |
| Weight                                       | 2.600 kg                |

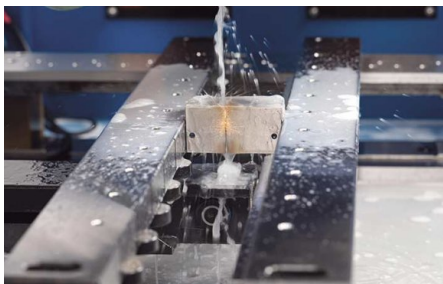

*The NeoSpark allows production of delicate contours with superior surface quality*

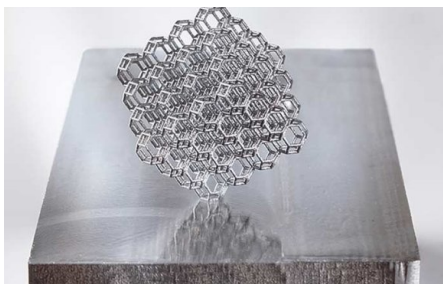

*The structures are constructed in layers and cut from the base plate*



*In additive production (3D-Printing) the produced complex parts are attached to a metal plate, where the metal plate subsequently will have to be separated from the component (Neospark 500 B Continental Engineering Services)*



*Dielectric tank with double filtration system*



*Stainless steel waterproof keyboard*

## PRODUCT DETAILS

- The NeoSpark CNC Electric Discharge Machine delivers excellent cutting performance and operating cost is extremely low
- The cast-iron machine frame features a modern C-frame with T-base, multiple reinforcing ribs, precision-machined surfaces and thermal stress-relief
- Rigid linear guides and precision preloaded ballscrews on all axes ensure permanent mechanical precision
- The IPC-based control system with servo drives is fine-tuned to the manufacturing process requirements and it is user-oriented and reliable
- 2-step filtration system in the dielectric tank ensures uninterrupted operation and high machining quality

### High-Speed Wire EDM - Cutting Technology for 3D Metal Printing

- Compared to mechanical divisions, there is virtually no pressure on the component
- Delicate structures can be machined without the risk of deformation or microcracking in the cut surface
- Perfect balance between cutting accuracy and high cutting speed
- Significantly more cost-efficient than conventional wire EDM
- Long wire life ensures high productivity and minimal downtimes

## STANDARD EQUIPMENT

IPC-based control system  
 Erosion wire 0.18 mm  
 Dielectricum 10 kg  
 Electronic manual control unit  
 Generator  
 USB port  
 Ethernet port  
 Standard wire guides  
 Dielectric tank with pump  
 Work lamp  
 Warning beacon  
 AC power stabler  
 Leveling plates and jacks  
 Central lubrication  
 Operating tools  
 Operating manual