



### SKU : 181625

The LabTurn is suitable for CNC training as well as for the production of small workpieces. The compact and mobile CNC lathe represents the full range of functions of a large production machine. The 8-station tool turret has four tools each for internal and external machining and long workpieces can be machined with a tailstock. The main spindle rotates continuously up to 3000 revolutions and the 3-jaw chuck has a diameter of 100 mm (3.9 in). With its simple, intuitive operator guidance, the Siemens 808 controller is the ideal introduction to CNC applications.

- Siemens 808 Advance is the ideal introductory machine
- Tool turret for inside and outside machining
- Linear guides and preloaded ball screws on all axes
- Enclosed machine housing
- Mobile machine base with ample storage space

## TECHNICAL SPECS

### WORKING AREA

Workpiece length (max.)	11 in
Turning diameter over bed	8 in
Turning-Ø over support	4 in

### TRAVELS

Travel X-axis	3.4 in
Travel Z-axis	6 in

### HEADSTOCK

Speed range	100 rpm - 3000 rpm
Spindle mount	MT 3
Spindle bore	0.8 in
Lathe chuck diameter	4 in

### RAPID FEED

Rapid feed X-axis	78.74 in/min
Rapid feed Z-axis	78.74 in/min

### FEED

Feed speed X-axis	39.37 in/min
Feed speed Z-axis	39.37 in/min
Max. torque feed motor X-axis	1.62 ft.lb.
Max. torque feed motor Z-axis	1.62 ft.lb.

### TOOL HEAD

Number of tool stations	8 positions
Tool shank dimensions	0.3 in x 0.3 in
Boring bar mount Ø	0.5 in

### ACCURACIES

Positioning accuracy X-axis	0.00087 in
Positioning accuracy Z-axis	0.00087 in
Repeatability X-axis	0.00039 in
Repeatability Z-axis	0.00039 in

### TAILSTOCK

Tailstock quill diameter	1 in
Tailstock quill stroke	1 in
Tailstock taper	MT 2

### DRIVE CAPACITY

Motor rating main drive	1.3 Hp
-------------------------	--------

### MEASURES AND WEIGHTS


Overall dimensions (length x width x height)	56 in x 36 in x 73 in
Weight	792 lbs




Slant bed machine frame



4-fold tool turret and tailstock

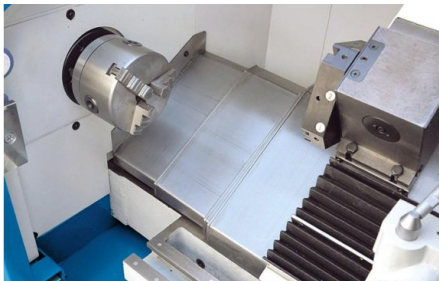

Manual 3-jaw chuck, 3.9" dia.

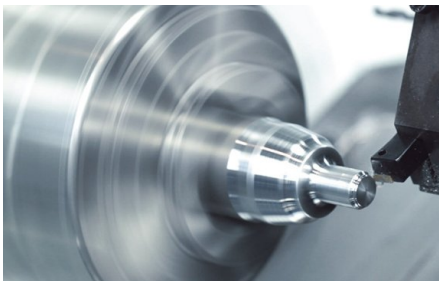

## PRODUCT DETAILS

### Highlights

- The LabTurn is an ideal lathe for CNC training and small batch production of high precision workpieces
- Rigid cast-iron inclined bed design ensures good stability and efficient chip removal
- Precision linear guides ensure high stability and accuracy
- Central lubrication for reduced maintenance

### Machine Design

- Enclosed workspace protects and a large sliding door provides easy access

### Spindle

- Hydraulic 100 mm 3-jaw chuck and rigid tailstock are included in standard equipment
- Max. spindle speed 3,000 rpm
- Spindle bore 0.8 in

### Tool Changer

- 8-station tool turret with 4 tools per station for inside and outside turning

## CONTROLS & SOFTWARE

### Siemens 808D Advance control

- SINUMERIK 808D ADVANCE -- the perfect solution for modern standard machines
- CNC and drive communicate via a high-speed bus to ensure efficient positioning control plus high precision and optimum cutting performance
- This is topped by a guaranteed superior price/performance ratio
- In combination with a new generation of spindle and axis drives, the SINUMERIK 808D ADVANCE with 8.4" LCD provides an innovative ready-to-use digital CNC solution for modern standard machines

### Advantages - Digital solution provides higher precision:

- Increased overload capacity supports a faster acceleration and deceleration of machine tools
- Constant cutting speeds result in an increased surface quality of the workpiece

### Increased ruggedness:

- During heavy machining operations, an automatic spindle torque adjustment will help protect machining tools and spindle systems.
- The SINAMICS features a wide voltage range to prevent machine shut-downs during poor voltage supply conditions. This will significantly reduce machine down-times.

### Increased operator comfort:

- A fast Ethernet connection facilitates easy start-up and diagnostics of machine tools and simplifies NC program use

## STANDARD EQUIPMENT

- Siemens 808D Advance control
- Electronic hand-wheel
- 8-station turret
- Mobile base
- Tailstock
- 3-jaw chuck (4" diam.)
- Central lubrication
- Work lamp
- Operating tools
- Operating manual and programming instructions