



SKU : 181625

The LabTurn is suitable for CNC training as well as for the production of small workpieces. The compact and mobile CNC lathe represents the full range of functions of a large production machine. The 8-station tool turret has four tools each for internal and external machining and long workpieces can be machined with a tailstock. The main spindle rotates continuously up to 3000 revolutions and the 3-jaw chuck has a diameter of 100 mm (3.9 in). With its simple, intuitive operator guidance, the Siemens 808 controller is the ideal introduction to CNC applications.

- Siemens 808D Advance is the ideal introductory machine
- Tool turret for inside and outside machining
- Linear guides and preloaded ball screws on all axes
- Enclosed machine housing
- Mobile machine base with ample storage space

TECHNICAL SPECS

WORKING AREA

Workpiece length (max.)	11 in
Turning diameter over bed	8 in
Turning-Ø over support	4 in

TRAVELS

Travel X-axis	3.4 in
Travel Z-axis	6 in

HEADSTOCK

Speed range	100 rpm - 3000 rpm
Spindle mount	MT 3
Spindle bore	0.8 in
Lathe chuck diameter	4 in

RAPID FEED

Rapid feed	79 in/min
------------	-----------

FEED

Feed speed	39 in/min
Max. torque feed motor	1.62 ft.lb.

TOOL HEAD

Number of tool stations	8 positions
Tool shank dimensions	0.3 in x 0.3 in
Boring bar mount Ø	0.5 in

ACCURACIES

Positioning accuracy X-axis	0.00087 in
Positioning accuracy Z-axis	0.00087 in
Repeatability X-axis	0.00039 in
Repeatability Z-axis	0.00039 in

TAILSTOCK

Tailstock quill diameter	1 in
Tailstock quill stroke	1 in
Tailstock taper	MT 2

DRIVE CAPACITY

Motor rating main drive	1.3 Hp
-------------------------	--------

MEASURES AND WEIGHTS


Overall dimensions (length x width x height)	56 in x 36 in x 73 in
Weight	1100 lbs



Slant bed machine frame



4-fold tool turret and tailstock

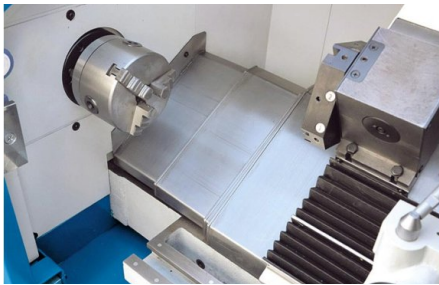

Manual 3-jaw chuck, 3.9" dia.



PRODUCT DETAILS

Highlights

- The LabTurn is an ideal lathe for CNC training and small batch production of high precision workpieces
- Rigid cast-iron inclined bed design ensures good stability and efficient chip removal
- Precision linear guides ensure high stability and accuracy
- Central lubrication for reduced maintenance

Machine Design

- Enclosed workspace protects and a large sliding door provides easy access

Spindle

- Hydraulic 100 mm 3-jaw chuck and rigid tailstock are included in standard equipment
- Max. spindle speed 3,000 rpm
- Spindle bore 0.8 in

Tool Changer

- 8-station tool turret with 4 tools per station for inside and outside turning

CONTROLS & SOFTWARE

Siemens 808D Advance control

- SINUMERIK 808D ADVANCE -- the perfect solution for modern standard machines
- CNC and drive communicate via a high-speed bus to ensure efficient positioning control plus high precision and optimum cutting performance
- This is topped by a guaranteed superior price/performance ratio
- In combination with a new generation of spindle and axis drives, the SINUMERIK 808D ADVANCE with 8.4" LCD provides an innovative ready-to-use digital CNC solution for modern standard machines

Advantages - Digital solution provides higher precision:

- Increased overload capacity supports a faster acceleration and deceleration of machine tools
- Constant cutting speeds result in an increased surface quality of the workpiece

Increased ruggedness:

- During heavy machining operations, an automatic spindle torque adjustment will help protect machining tools and spindle systems.
- The SINAMICS features a wide voltage range to prevent machine shut-downs during poor voltage supply conditions. This will significantly reduce machine down-times.

Increased operator comfort:

- A fast Ethernet connection facilitates easy start-up and diagnostics of machine tools and simplifies NC program use

STANDARD EQUIPMENT

Siemens 808D Advance control
 Electronic hand-wheel
 8-station turret
 Mobile base
 Tailstock
 3-jaw chuck (4" diam.)
 Central lubrication
 Work lamp
 Operating tools
 Operating manual and programming instructions

OPTIONAL EQUIPMENT

- Set of indexable inserts, SKU : 251478
- Turning tool set (7 pieces) 0.315 x 0.315", SKU : 251477