

Conventional Cylindrical Grinders

RSM 750 C

SKU : 302444

The models of the RSM C series are precision cylindrical grinding machines designed for long and heavier workpieces. The series is suitable for processing individual parts as well as for small series production and offer additional flexibility with the internal grinding device. The classic design with a large machine bed, ground guides, and powerful drives for the work spindle, grinding spindle and hydraulic unit, make these machines a cost-effective solution for the precision grinding of larger workpieces.

- Internal and external grinding
- Hydrostatic bearings for high surface quality
- Heavy machine frame to support large workpieces
- Swiveling headstock for conical grinding of short parts
- Integrated rapid feed on Z-axis with manual return
- Extensive package of standard accessories



TECHNICAL SPECS

WORKING AREA

Center height	5 in
Grinding diameter	0.3 in - 7.9 in
With steady rest	0 in - 2 in
Grinding length	30 in
Inside grinding diameter with rest	1.4 in - 3.9 in
Inside grinding diameter without rest	1 in - 3.9 in
Inside grinding depth	4.9 in
Work piece weight between centers (max.)	176 lbs
Grinding wheel feed (min.)	0.0001 in
Chuck diameter	8 in
Table swivel range (max.)	-2° / +6°
Wheel speeds	1365 in/s
Work spindle speeds	50 Hz: 25-380 rpm

TRAVELS

Grinding head travel	8 in
----------------------	------

FEED

Table feed, infinitely variable	0.33 fpm - 13.08 fpm
Feed per hand-wheel rotation X-axis	0.0197 in
Feed per scale division X-axis	0.000098 in

HEADSTOCK

Working headstock swivel range	0 deg - 45 deg
Working spindle taper	4 MT

GRINDING HEADSTOCK

Grinding spindle speed	1670 rpm
Grinding headstock swivel range (r+l)	10°
Inside grinding spindle speed	10000 rpm

TAILSTOCK

Tailstock taper	4 MT
Tailstock quill stroke	1 in

DRIVE CAPACITY


Motor rating - grinding spindle / hydraulic pump	536 / 1 Hp
Motor rating inside grinding	1.5 Hp
Motor rating - headstock / coolant pump	1 / 0,17 Hp

MEASURES AND WEIGHTS

Grinding wheel dimensions	15.75 in x 1.97 in x 7.99 in
Grindstone dimensions, inside grinding (max.)	2 in x 1.6 in x 0.6 in
Grindstone dimensions, inside grinding (min.)	1.8 in x 1.4 in x 0.4 in
Overall dimensions (length x width x height)	119 in x 71 in x 65 in
Weight	7700 lbs



Wet grinding with rotating part

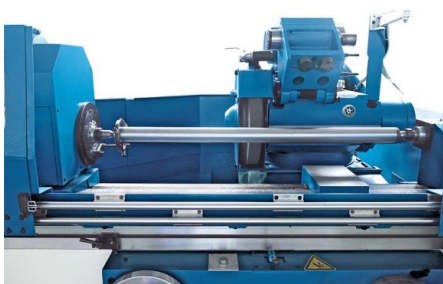

RSM Series Grinding Spindle

PRODUCT DETAILS

- Large machine bed in a heavy design accommodates workpieces with lengths up to 79 inch and diameters up to 12 inch
- Wide, precision-ground guideways ensure maximum accuracy across the entire workpiece length and accommodate high workpiece weights
- The table features large dimensions and swivels in two directions - table movement via hand-wheel or automatically via linear hydraulic feed
- The robust feed valve allows very precise micro-feed control on the X-axis, including a user-adjustable dwell time at the end of the longitudinal table travel
- Automatic feed in 2 steps – limited by an adjustable stop
- The grinding spindle features hydrostatic bearings and provides for maximum precision and surface quality, plus extraordinary tool life and rigidity
- The powerful grinding spindle motor is designed for continuous operation
- The heavy-duty spindle head swivels 30° to the left and to the right; the work spindle head swivels 45°
- Inside grinder included
- Integrated rapid feed on Z axis with manual return

STANDARD EQUIPMENT

2-axis position indicator X.Pos 3.2
 3-jaw chuck, Ø 7.87"
 Balancing mandrel
 Balancing station
 Center point
 Coolant system
 Grinding wheel dresser
 Grinding wheel flange
 Internal grinding equipment
 Operator manual
 Operating tools
 Follow rest
 Steady rest (open)
 Steady rest (closed)