



# Vertical Machining Centers VECTOR 1000 M SI



**SKU : 423514**

## CUSTOM MODEL

The Vector series is the compact all-in-one machining solution, designed and preconfigured for complex manufacturing challenges. The machines are designed using the latest FEM analysis software. The production takes place under strict quality control in order to guarantee perfect execution. Both the tried and tested Meehanite cast and the delta construction of the column ensure additional stability of the machine frame. The consistently high-quality components guarantee smooth operation during multiple shifts.

- Optimized frame design using FEM analysis
- Extra wide Y-shaped meehanite column for max. rigidity
- 30-bar through-spindle coolant to ensure optimum machining quality
- Built for multi-shift production
- High customization and automation possibilities
- 2 years standard warranty

## TECHNICAL SPECS

### WORKING AREA

Table dimensions	43 in x 22 in
Table load capacity	1760 lbs
Spindle nose-to-table surface distance	6 in - 28 in
Spindle center - column	20 in

### TRAVELS

Travel X-axis	39.4 in
Travel Y-axis	22 in
Travel Z-axis	22 in
Guideway	Roller

### HEADSTOCK

Spindle speed	10000 rpm
Spindle mount	SK 40
Torque, constant	42 ft.lb.
Spindle bearing	7012 x 4
Spindle drive method	Riemenantrieb

### RAPID FEED

Rapid feed X-/ Y-axis	1417 in/min
Rapid feed Z-axis	590.55 in/min

### FEED

Work feed X-axis	393.7 in/min
Work feed Y-axis	393.7 in/min
Work feed Z-axis	393.7 in/min

### TOOL HEAD

Tool change type	Doppelarm
Number of tool stations	24 positions
Tool selection	Memory random
Tool size Ø x L (max.)	3.15 in x 13.78 in
Tool weight max.	15 lbs
Tool-change time tool/tool	1.8 sec
Tool-changing time chip/chip	3.9 sec

### ACCURACIES

Repeatabilities	± 0003 / ± 0,00012" in
Positioning accuracies	± 0005/ 0,0002" in

### DRIVE CAPACITY

Main drive, continuous load	12.07 Hp
Total power consumption	15 kVA
Voltage	400 V
Mains frequency	50 Hz

### CONTROL

Control	Siemens
---------	---------

### MEASURES AND WEIGHTS

Overall dimensions (length x width x height)	104 in x 87 in x 107 in
Weight	10120 lbs

## PRODUCT DETAILS




### Highlights

- Rigid machine structure with extra deep center of gravity and small footprint

### Machine Design

- 30 mm preloaded ball screws combined with a digital drive package provide a rigid table guide and high torque
- A major focus during development of this machine was a space-saving design
- Dual-arm tool changer with 24 stations ensures adequate flexibility and capacity for every day production needs
- The Vector Series features linear guides on X, Y and Z to ensure high accuracy made possible by lower friction
- 435 psi internal cooling for optimum machining quality

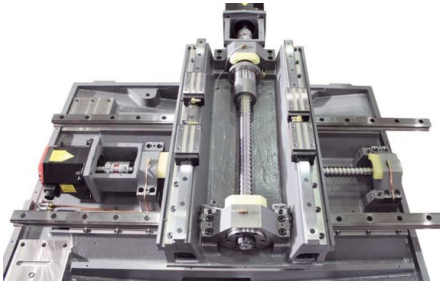


### Spindle

- Spindle runs on multiple bearings to ensure excellent absorption and dissipation of forces during machining

### Tool Changer

- Changing times (1.8 seconds tool-to-tool and 3.9 seconds chip-to-chip) increase spindle up-time and machine output

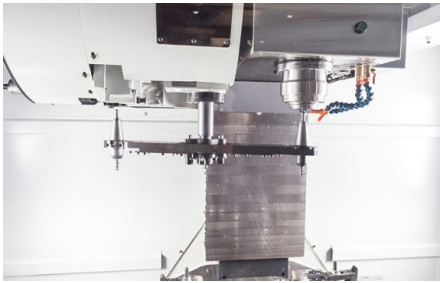

### Control Siemens Sinumerik 828D

- The top specialist for demanding milling operations
- Compact, robust, maintenance-free control panel-based CNC
- Comfortable program and parameter input via QWERTY keyboard
- 100 adjustable zero offsets
- Synchronous actions, and quick output of help functions
- Siemens Sinumerik 828 D
- Maximum machining precision
- Intelligent kinematic transformations for machining of cylindrical parts, and for angled workpiece levels
- SINUMERIK MDynamics with the new Advanced Surface feature: for perfect part surfaces and shortest machining times in die making applications
- Siemens Sinumerik 828D CNC highlights, specifications and features
- ShopMill: shortest programming time for single parts and small batch productions
- ProgramGUIDE: fastest machining time and maximum flexibility for high-volume series productions
- Unique spectrum of technology cycles - from milling contours with residual material recognition to process measurements
- Animated elements: unique operation and programming assistance with animated sequences
- Advanced data transfer options via USB stick, CF card and network (Ethernet)
- Easy message: maximum machine availability due to process monitoring per texting (SMS)
- SINUMERIK MDynamics package with Advanced Surface for mold making applications
- Jerk-limited acceleration
- Dynamic feed-forward control
- 4-axis simultaneous interpolation (X, Y, Z and rotary axis)
- Linear, circular and helical interpolation
- Tapping without compensating chuck, plus thread cutting
- Oriented spindle hold
- Toggle between inch and metric units
- FRAME concept for individual coordinate transformations, rotations, scaling and mirroring



*SINUMERIK 828D control with its unique CNC performance sets new standards for productivity*

### Optional equipment: Preparation (wiring) for Renishaw TS 27R and OMP 40

## STANDARD EQUIPMENT

Prepared for Renishaw TS 27  
Siemens 828D control with Shopmill  
Coolant flow through spindle, 30 bar with double filter  
24-station tool changer with dual-arm  
Main spindle motor 12 HP  
ST 40 mount

Spindle oil cooler  
Chain-type conveyor with chip container  
Electronic hand-wheel  
Oil skimmer  
Automatic central lubrication  
Coolant gun  
Chip flushing system  
Heat exchanger for electric control cabinet  
Telescoping axis cover  
USB port  
CF card reader  
Totally enclosed work space  
Work lamp  
3-color signal lamp  
Coolant system  
Adjustable machine feet  
Operating tools  
Operator instructions

## OPTIONAL EQUIPMENT

- Top cover for X.Mill/Vector 650-1000, SKU : 252819
- Renishaw OMP 40 workpiece measuring, SKU : 252820
- Connection for 4th axis (wiring only and axis chart), SKU : 253019
- Siemens Function: P25: 3D Simulation, SKU : 253378
- Siemens Function: P13: Residual Material Detection, SKU : 253379
- Siemens Function: P22: Simultaneous Recording, SKU : 253380
- Renishaw TS27R tool measuring system, SKU : 253386
- Siemens measuring cycles, SKU : 253438
- Renishaw OTS wireless tool setter (OTS), SKU : 253598
- Ø170mm 4th axis (4th axis, servo motor, driver, air brakes)(Si), SKU : 253605
- Ø210mm 4th axis (4th axis, servo motor, driver, air brakes)(Si), SKU : 253606
- Ø250mm 4th axis (4th axis, servo motor, driver, air brakes)(Si), SKU : 253607
- Prepared for Renishaw OMP40, SKU : 253613
- Manual tailstock ST-170T for rotary table, SKU : 253618
- Manual tailstock ST-255T for rotary table, SKU : 253620
- Manual chuck, 6", for rotary table, SKU : 253622
- Manual chuck, 9", for rotary table, SKU : 253624
- Reinforced machine base with 800 mm Z axis travel, SKU : 253625
- Upgrade from 10.4" to 15" Touchscreen (Si) for Vector, SKU : 253674
- Renishaw OMP 60 workpiece measuring system (BT40), SKU : 253681
- 7.87" diam. 4th & 5th axis for Vector 650/850/1000 (Si), SKU : 253682
- Spindle speed upgrade to 12000 rpm, belt-type, SKU : 253781
- Air through spindle for Vector, SKU : 253782
- Upgrade from 828D PPU260 to 840DSL IPC447E 10.4" for Vector, SKU : 253835
- Spindle upgrade from ST40 to BBT40 for X.Mill/Vector 650-1000, SKU : 253951
- Spindle upgrade from ST40 to HSK63 for Vector 650-1000, SKU : 253953
- 12,000 rpm, direct drive CTS for Vector 650-1200(Si), SKU : 253956