

SKU : 131184

The hydraulic profile steel shears of the HPS H series cut and punch flat steel, bars and profiles extremely precisely and efficiently. Section steel shears like these are mainly used in locksmiths' shops, repair shops and in vehicle construction. As one- or two-cylinder, the construction impresses with its multifunctionality. It combines flat steel shears, notchers, hole punches and profile steel shears in one machine. The punching machine of the HPS series works with common punches and dies, which extends the range of applications of the machines.

- 5 workstations
- High cutting performance and compact dimensions
- Fast and precise work
- Complete set of blades for all functions
- Clean cuts and easy material handling



TECHNICAL SPECS

WORKING AREA

| | |
|-------------------------------|-------------|
| Number of hydraulic cylinders | 2 positions |
|-------------------------------|-------------|

PUNCH PRESS

| | |
|---------------------------------|---------------|
| Pressure force | 115 t |
| Punch capacity (max.) | 34 mm x 26 mm |
| Diameter x thickness | 55 mm x 16 mm |
| Throat | 405 mm |
| Stroke | 80 mm |
| Stroke number (at 20 mm stroke) | 25 H/min |
| Working height | 1070 mm |

STEEL CUTTER

| | |
|--|----------------|
| Cutting capacity flat (max. width) | 600 mm x 15 mm |
| Cutting capacity flat (max. thickness) | 380 mm x 25 mm |
| Knife length | 610 mm |
| Cutting capacity round | 55 mm |
| Cutting capacity square | 50 mm |
| Steel cutter working height | 905 mm |

PROFILE CUTTER

| | |
|-------------------------------|-------------------------|
| Cutting capacity 90° | 160 mm x 160 mm x 16 mm |
| Cutting capacity 45° | 80 mm x 8 mm |
| Profile cutter working height | 1190 mm |

NOTCHER

| | |
|------------------------|--------|
| Plate thickness (max.) | 13 mm |
| Width | 60 mm |
| Depth | 100 mm |

DRIVE CAPACITY

| | |
|-----------------------------|-------|
| Motor rating hydraulic pump | 11 kW |
|-----------------------------|-------|

MEASURES AND WEIGHTS

| | |
|--|--------------------------|
| Overall dimensions (length x width x height) | 2.05 m x 0.77 m x 2.03 m |
| Weight | 3150 kg |

*


| | |
|--|-----------------------|
| Cutting performance with material tensile strength | 400 N/mm ² |
|--|-----------------------|




• Models HPS 45H and HPS 60 H feature a powerful hydraulic cylinder • Models HPS 65 H, HPS 85 H, HPS 115 H and HPS 175 feature 2 hydraulic cylinders allowing simultaneous operation at 2 stations



Back gauge with automatic cut activation

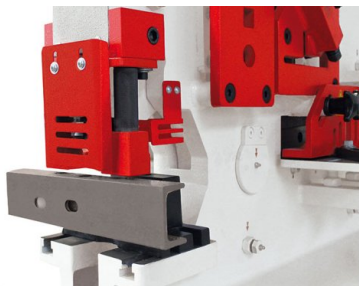

Notching station with safeguard

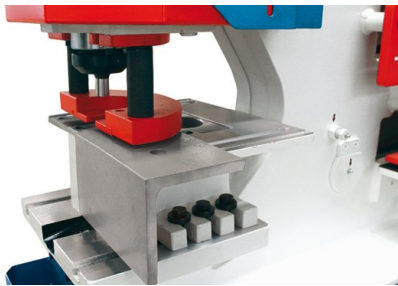

Hole punch station featuring large support table



Compact design and excellent rigidity

PRODUCT DETAILS

Flat Steel Cutters

- For strip steel, flat steel, wide flat steel
- Table with angular and linear stops
- Adjustable hold-down
- Lower knife provides 4 cutting edges

Angular Profile Steel Cutters

- For angle steel sections
- Cut angle 90° and 45°
- Adjustable material guide plate

Rod Steel Station

- For round and square steel
- Robust material guide plate

Back Gauge

- Including swivel boom
- For use on Flat Steel, Angular Steel and Rod Steel Stations

Hole Punch Station

- For punching round holes and slots in sheet metals, flat steel and U-section steel
- Table with adjustable angular stops
- Infinitely variable stroke adjustment
- Premium Kingsland tools
- Hydraulic overload protection

Notching Station

- Rigid support table with adjustable stops

STANDARD EQUIPMENT

Easy replaceable punch holder
 Stamps and dies
 Angle cutting blade
 Flat bar cutting blade
 Notching blade
 Solid bar cutting blade
 Electric backgauge with automatic cutting (1.000mm)
 Foot pedal with emergency stop button
 Hook spanner wrench
 Work lamp

OPTIONAL EQUIPMENT

- Cutting blade for UPN profiles for HPS 115 H, SKU : 253589