


Conventional Horizontal Lathes

DL E Heavy 1000/3000

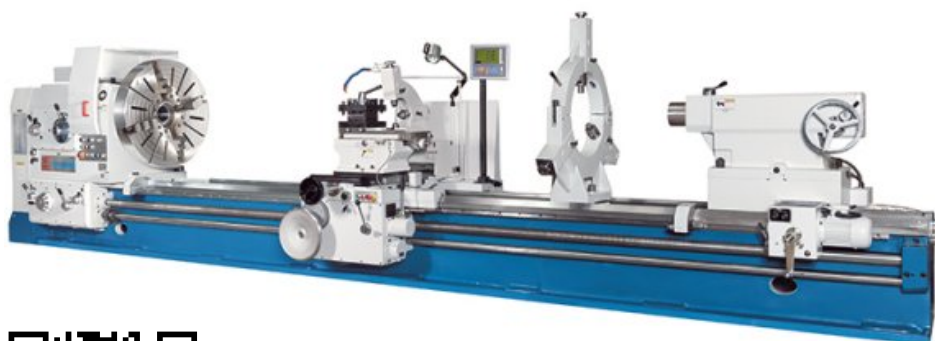

SKU : 300519

With the machines of the DL E Heavy series, you can machine really large turning diameters and workpiece lengths. This lathe series is the solution for conventional machining of workpieces up to 8000 mm (315 in.) in length and over 1600 mm (63 in.) in diameter. The particularly wide and heavily ribbed machine bed takes heavy workpiece weights. Powerful motors drive the main spindle via a finely adjustable multi-disc clutch. The rapid traverse in the support is particularly effective with large bed lengths and the heavy tailstock is also moved with a motor drive.

- Center widths up to 315"
- Spindle bore of 5.12"
- Powerful motor
- Rapid feed in X and Z directions
- Complete with assembled 3-axis position indicator

TECHNICAL SPECS

WORKING AREA

Workpiece length (max.)	118 in
Turning diameter over bed	79 in
Turning-Ø over support	63 in
Workpiece weight (max.)	22000 lbs
Bed width	43 in
Max. weight capacity (between centers)	22000 lbs
Max. weight capacity (on chuck)	3300 lbs

TRAVELS

Travel X-axis	40.2 in
Travel Z-axis	110 in
Travel Z1-axis	8 in
Swing range of top slide	± 180°

HEADSTOCK

Spindle speeds (right)	2 rpm - 200 rpm
Spindle speeds (left)	2.5 rpm - 200 rpm
Spindle bore	5.1 in
Spindle mount	A2-15

RAPID FEED

Rapid feed X-axis	73.62 in/min
Rapid feed Z-axis	147.24 in/min

FEED

Feed X-axis	0.00252 in/R - 0.47244 in/R
Feed Z-axis	0.00126 in/R - 0.23622 in/R
Feed Z1-axis	0 in/R - 0.12 in/R

THREADING

Threading, metric	1 mm - 120 mm
Threading, diametric	(42) 30 - 1/4 DP
Threading, module	0.5 mm - 60 mm
Threading, whitworth	(48) 05 - 60 TPI

TAILSTOCK


Tailstock quill diameter	8 in
Tailstock quill taper	MT 6
Tailstock quill stroke	12 in
Tailstock traverse adjustment	± 0,1 in

DRIVE CAPACITY

Motor rating main drive	40.2 Hp
-------------------------	---------

MEASURES AND WEIGHTS

Overall dimensions (length x width x height)	241 in x 87 in x 95 in
Weight	40700 lbs

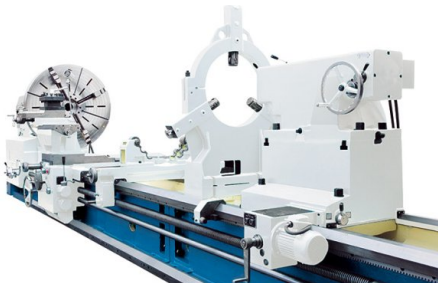

PRODUCT DETAILS

- Powerful 40-HP motor ensures very high chip removal capacity
- Heavy, large cast-iron body and machine bed with strong ribbing to reduce vibrations to a minimum
- Induction hardened and ground guideways
- Joystick control for X and Z feeds is mounted directly to support
- Hand wheel for tailstock adjustment
- Separate rapid feed motor for feed in X and Z-axis
- Sturdy multi-disk clutch for headstock drive
- Large spindle bearings
- Includes completely assembled 3-axis position indicator
- Overload clutch enclosed in apron

3-axis position indicator

- More accuracy
- Lower error rate
- Increased productivity
- Resulting in valuable time savings
- For increased productivity
- Easy to read display
- Operator-specific features
- Convenient keyboard layout
- Resolution: 0.0004 / 0.0002"
- Default coordinates
- Axis position is maintained when display is turned off
- Hole circle pattern calculation
- Calculator function
- Storage for 10 tools
- Radius / diameter toggle
- Mm/inch conversion
- Easy expansion and maintenance-free operation
- Display for top (Z0) and box way slide (Z1) both separate and in differential / cumulative mode for lathes

STANDARD EQUIPMENT

3-axis position indicator X.Pos 3.2
 4-jaw face plate chuck Ø 63"
 Coolant system
 Steady rest 9" - 25"
 Motorized tailstock
 LED work lamp
 Center points
 Reducing sleeve
 Foundation bolts
 Central lubrication
 Operating tools
 Operator instructions

OPTIONAL EQUIPMENT

- Follow rest 2"-9", SKU : 250645
- Steady rest 20"-43", SKU : 250646