



SKU : 302446

The models of the RSM C series are precision cylindrical grinding machines designed for long and heavier workpieces. The series is suitable for processing individual parts as well as for small series production and offer additional flexibility with the internal grinding device. The classic design with a large machine bed, ground guides, and powerful drives for the work spindle, grinding spindle and hydraulic unit, make these machines a cost-effective solution for the precision grinding of larger workpieces.

- Internal and external grinding
- Hydrostatic bearings for high surface quality
- Heavy machine frame to support large workpieces
- Swiveling headstock for conical grinding of short parts
- Integrated rapid feed on Z-axis with manual return
- Extensive package of standard accessories

TECHNICAL SPECS

WORKING AREA

Center height	7 in
Grinding diameter	0.3 in - 12.6 in
With steady rest	2 in
Grinding length	59 in
Inside grinding diameter with rest	1.4 in - 3.9 in
Inside grinding diameter without rest	1.2 in - 3.9 in
Inside grinding depth	4.9 in
Work piece weight between centers (max.)	330 lbs
Grinding wheel feed (min.)	0.0001 in
Chuck diameter	8 in
Table swivel range (max.)	-3° / +6°
Work spindle speeds	50 Hz: 25-220 rpm
Wheel speeds	1365 in/s

TRAVELS

Grinding head travel	10 in
----------------------	-------

FEED

Table feed, infinitely variable	0.33 fpm - 13.08 fpm
Feed per hand-wheel rotation X-axis	0.0787 in
Feed per scale division X-axis	0.000098 in

HEADSTOCK

Working headstock swivel range	0 deg - 45 deg
Working spindle taper	4 MT

GRINDING HEADSTOCK

Grinding spindle speed	1670 rpm
Grinding headstock swivel range (r+l)	30°
Inside grinding spindle speed	10000 rpm

TAILSTOCK


Tailstock taper	4 MT
Tailstock quill stroke	1 in

DRIVE CAPACITY

Motor rating - grinding spindle / hydraulic pump	4 / 0,6 Hp
Motor rating inside grinding	1.5 Hp
Motor rating - headstock / coolant pump	1 / 0,1 Hp

MEASURES AND WEIGHTS

Grinding wheel dimensions	15.75 in x 1.97 in x 7.99 in
Grindstone dimensions, inside grinding (max.)	2 in x 1.6 in x 0.6 in
Grindstone dimensions, inside grinding (min.)	1.8 in x 1.4 in x 0.4 in
Overall dimensions (length x width x height)	182 in x 72 in x 60 in
Weight	9460 lbs

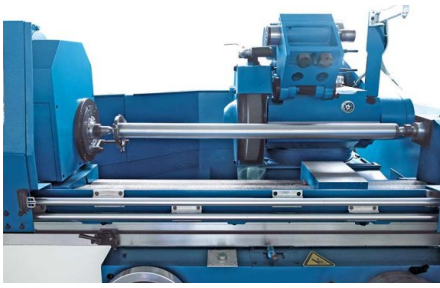

PRODUCT DETAILS

- Large machine bed in a heavy design accommodates workpieces with lengths up to 79 inch and diameters up to 12 inch
- Wide, precision-ground guideways ensure maximum accuracy across the entire workpiece length and accommodate high workpiece weights
- The table features large dimensions and swivels in two directions - table movement via hand-wheel or automatically via linear hydraulic feed
- The robust feed valve allows very precise micro-feed control on the X-axis, including a user-adjustable dwell time at the end of the longitudinal table travel
- Automatic feed in 2 steps – limited by an adjustable stop
- The grinding spindle features hydrostatic bearings and provides for maximum precision and surface quality, plus extraordinary tool life and rigidity
- The powerful grinding spindle motor is designed for continuous operation
- The heavy-duty spindle head swivels 30° to the left and to the right; the work spindle head swivels 45°
- Inside grinder included
- Integrated rapid feed on Z axis with manual return

STANDARD EQUIPMENT

2-axis position indicator X.Pos 3.2
Internal grinding equipment
Open rest
Closed rest
3-jaw chuck, Ø 7.87"
Coolant system
Grinding wheel dresser
Balancing station
Balancing mandrel
Grinding wheel flange
Center point
Front and rear splatter guard
Drivers
Operating tools
Operator manual