



SKU : 470580

This series of hydraulic workshop presses with motor drive are designed with a stable portal with adjustable, open support table and are suitable for applications such as pressing in and out bearings, for assembly and straightening work or for testing workpieces. The laterally positionable working cylinder facilitates set-up without the workpiece having to be moved. These presses are almost indispensable in technical workshops and maintenance departments.

- Motorized hydraulic drive
- Horizontal piston travel
- Adjustable table height
- Set of prismatic blocks



TECHNICAL SPECS

WORKING AREA

Working width	600 mm
Frame through-hole	200 mm
Pressure force	20 t
Operating pressure (max.)	400 bar
Stroke	300 mm
Forward motion speed	7 mm/s
Press speed	7 mm/s
Return speed	12 mm/s

DIMENSIONS



A	2200 mm
B	960 mm
C	845 mm
D	600 mm
E	200 mm
F	1350 mm

DRIVE CAPACITY

Motor rating hydraulic pump	2.2 kW
-----------------------------	--------

MEASURES AND WEIGHTS

Hydraulic tank volume	6 l
Weight	500 kg
Dimensions (L X W X H)	1350 mm x 850 mm x 2200 mm

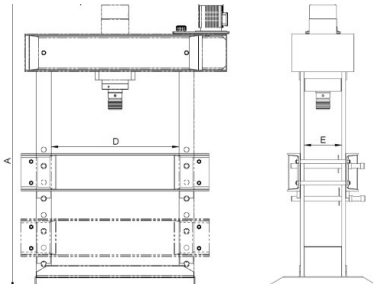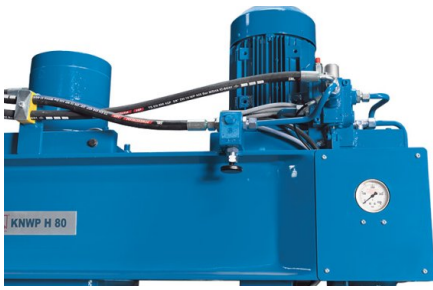

PRODUCT DETAILS

- Torsionally rigid welded gantry-style frame made of thick-walled sectional steel
- Heavy-duty design, intended for professional use
- Versatile for many kinds of repair and assembly work
- Finely adjustable press force for trueing axles, supports, shafts, and much more
- Long piston stroke for removing and press-fitting bearings and bushings
- The operator can see the current working pressure on the gauge at all times.
- Motorized hydraulic unit for efficient operation
- Work cylinder with smooth horizontal adjustment for easier setup
- Premium components for guaranteed long-lasting reliable operation

Standard Equipment:

- Movable working cylinder
- Height-adjustable worktable
- Prism block set
- Pressure gauge
- Operator manual